

EFURCB Series

Project		
Туре	Date	
Address		
Company		



• Compatible with any home automation system:

CLUTRON




Control (4

- Any on/off switch
- 0 to 100% Dimming capabilities
- Programmable Sequential Timer (Optional)



FEATURES

The Universal Relay Control Box facilitates the management of multiple heaters by establishing diverse heat zones within a designated area through the use of 0-10V solid state relays, offering the user the option to incorporate dimming capbilities to the heaters.

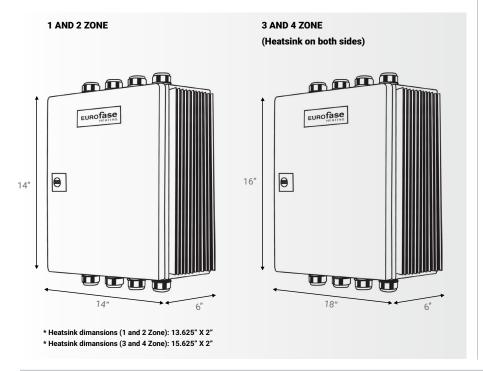

SPECIFICATIONS

SERIES	EFURCB
COLOR	Light Grey
INPUT VOLTAGE	208V, 240V, 277V, 480V
ZONE CAPACITY	50A
MAX. AMPERAGE	200A
CONTROL VOLTAGE	0V-10V DC
MOUNTING TYPE	Surface mount
LENGTH (1 and 2 Zone)	14"
LENGTH (3 and 4 Zone)	16"
WIDTH (1 and 2 Zone)	12"
WIDTH (3 and 4 Zone)	14"
DEPTH	6"
ENCLOSURE RATING	NEMA 4
WARRANTY	3 year
COUNTRY OF ORIGIN	Canada

SPECIFICATION GUIDE

DESCRIPTION	CODE	VOLTAGE	CODE	ZONES	CODE
Universal relay Control Box	EFURCB	120V-240V	24	1 ZONE	M1
		240V-480V	48	2 ZONE	M2
				3 ZONE	M3
				4 ZONE	M4

ORDERING GUIDE EXAMPLE:
Universal relay Control Box + 277V +2 Zone= EFURCB + 48 + M2
EEURCB48M2

ORDERING GUIDE EXAMPLE: Universal relay Control Box + 208V + 4 Zone = EFURCB24M4

· For custom manufacturing contact sales